

NEK6187Z



ENGINEERING CODE
268JA51



REFRIGERANT
R-134a



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
HBP



MOTOR TYPE
CSIR



STANDARD
CECOMAF



COOLING CAPACITY
852 W



EFFICIENCY
2 W/W



DATA

GENERAL DATA

Model	NEK6187Z
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	HBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1/3
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	22.18 Ω at 25°C
Run Winding Resistance	10.05 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	15 A

MECHANICAL DATA

Displacement	9.99 cm ³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	10.2 Kg

ELECTRICAL COMPONENTS

Start Capacitor	64-77 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-0028*
Overload Protection	T1026

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-134a
Tested Application	HBP
Tested Standard	CECOMAF
Tested Cooling	Fan
Tested Voltage	220 V
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
55	5	852	2	427	-	20.93

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	458	1.82	252	-	9.14
-10	582	2.10	277	-	11.65
-5	730	2.40	304	-	14.68
0	904	2.75	329	-	18.28
5	1107	3.18	348	-	22.51
10	1339	3.74	358	-	27.43

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	401	1.46	273	-	8.71
-10	512	1.71	299	-	11.18
-5	645	1.95	331	-	14.14
0	801	2.19	366	-	17.67
5	982	2.45	401	-	21.81
10	1190	2.77	430	-	26.64

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	437	1.40	311	-	10.54
-5	554	1.62	343	-	13.43
0	692	1.81	383	-	16.88
5	852	2.00	427	-	20.93
10	1036	2.20	471	-	25.66

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

ENVELOPE




External

EXTERNAL CHARACTERISTICS


Base Plate		SMALL	
Tray Holder		NO	
Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

EXTERNAL DIMENSIONS

SHELL

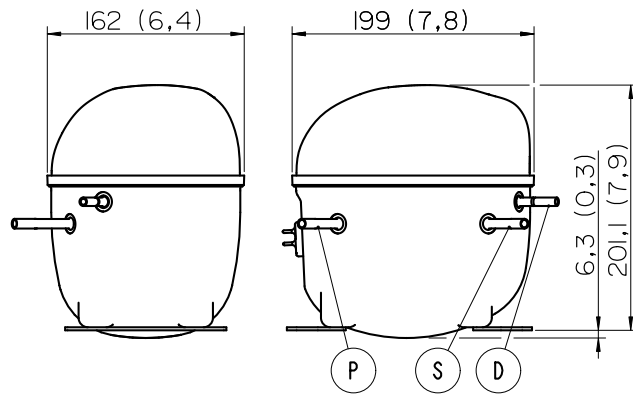

BASE

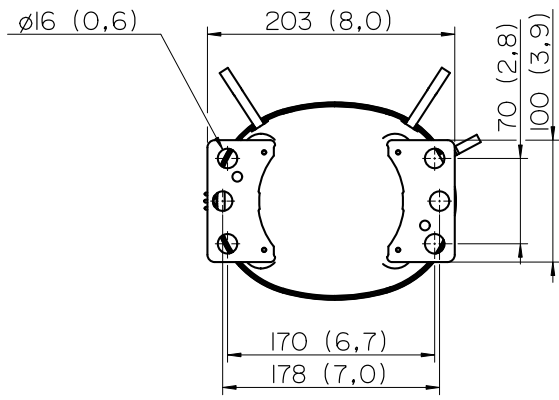

FENCE

