


NEK6213GK

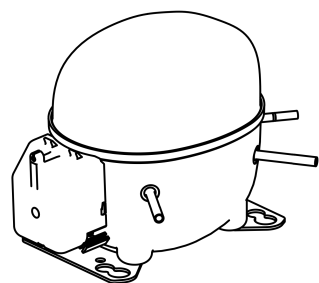

**ENGINEERING CODE**  
959BA51

**REFRIGERANT**  
R-404A

**POWER SUPPLY**  
220-240 V 50 Hz

**APPLICATION**  
MBP

**MOTOR TYPE**  
CSIR

**STANDARD**  
CECOMAF

**COOLING CAPACITY**  
789 W

**EFFICIENCY**  
1.15 W/W

DATA

GENERAL DATA

Model	NEK6213GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1/2+
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	20.88 Ω at 25°C
Run Winding Resistance	3.93 Ω at 25°C

## MECHANICAL DATA

Displacement	12.11 cm <sup>3</sup>
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	11.6 Kg

## ELECTRICAL COMPONENTS

Start Capacitor	53-64 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-0050*
Overload Protection	T0743/G6

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	CECOMAF
Tested Cooling	Fan
Tested Voltage	220 V
Refrigerant Temperature	Dew

### RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
55	-10	789	1.15	688	-	25.19

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

### PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	841	1.62	518	-	20.18
-15	1011	1.79	564	-	24.52
-10	1203	1.95	616	-	29.34
-5	1423	2.13	669	-	34.94
0	1678	2.33	719	-	41.58
5	1975	2.60	760	-	49.56
10	2321	2.95	788	-	59.14

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

## PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	669	1.20	560	-	18.11
-15	821	1.35	608	-	22.37
-10	990	1.48	670	-	27.18
-5	1185	1.60	739	-	32.83
0	1413	1.74	812	-	39.60
5	1680	1.90	883	-	47.77
10	1994	2.11	946	-	57.62

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.


## PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	789	1.15	688	-	25.19
-5	954	1.25	765	-	30.81
0	1149	1.35	853	-	37.63
5	1380	1.46	945	-	45.91
10	1656	1.60	1036	-	55.94

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

## ENVELOPE

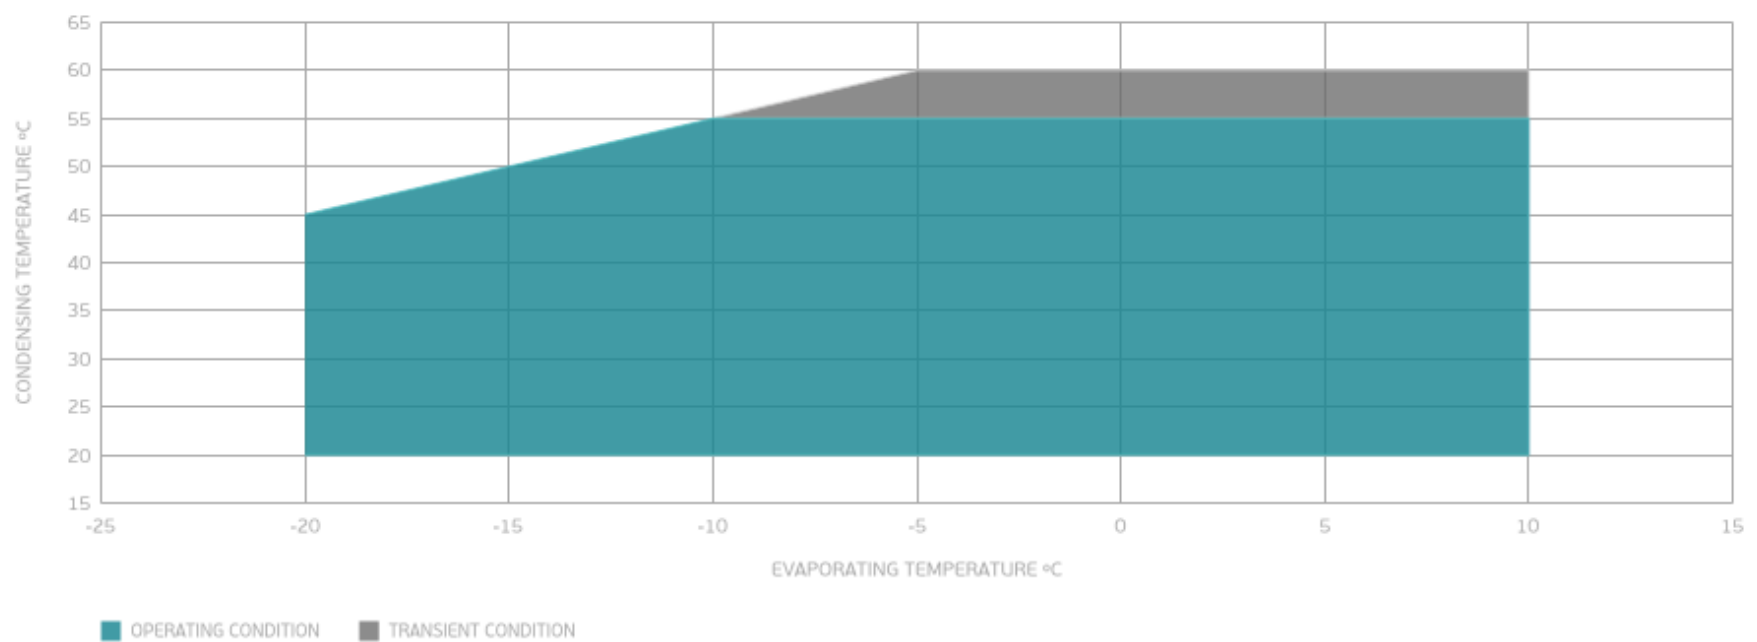

## External

### EXTERNAL CHARACTERISTICS

Base Plate		SMALL	
Tray Holder		NO	
<b>Connector</b>	<b>Internal Diameter</b>	<b>Shape</b>	<b>Material</b>
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER

EXTERNAL DIMENSIONS

SHELL



BASE



FENCE

