


NT2180U



**ENGINEERING CODE**  
843AA04

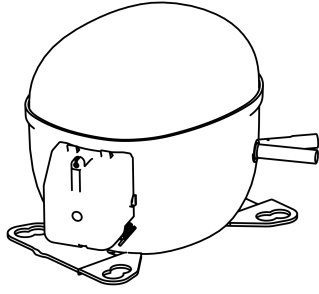

**REFRIGERANT**  
R-290



**POWER SUPPLY**  
220-240 V 50 Hz



**APPLICATION**  
LBP



**MOTOR TYPE**  
CSCR




**STANDARD**  
ASHRAE



**COOLING CAPACITY**  
932 W



**EFFICIENCY**  
1.47 W/W



DATA

GENERAL DATA

Model	NT2180U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	8.56 Ω at 25°C
Run Winding Resistance	1.82 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	35 A

## MECHANICAL DATA

Displacement	22.37 cm <sup>3</sup>
Oil Charge	450 ml
Oil Type	AB
Oil Viscosity	ISO32
Weight	18 Kg

## ELECTRICAL COMPONENTS

Start Capacitor	43-53 µf/330 V
Run Capacitor	15.0 µf/440 V
CSR CSIR BOX	Yes
Starting Device Description	RVA4AH3C-648
Overload Protection	MRA38170-3261

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	LBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Max Refrigerant Charge	400 g
Refrigerant Temperature	Dew

### RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-23.3	932	1.47	636	3.27	9.47

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	492	1.23	399	2.28	4.95
-35	639	1.41	452	2.49	6.45
-30	818	1.61	508	2.72	8.28
-25	1032	1.82	565	2.95	10.47
-20	1282	2.07	620	3.18	13.06
-15	1573	2.35	669	3.42	16.08
-10	1907	2.69	708	3.67	19.57

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	433	1.06	408	2.31	4.37
-35	573	1.23	465	2.55	5.78
-30	744	1.41	529	2.80	7.52
-25	949	1.59	598	3.07	9.62
-20	1191	1.78	668	3.35	12.12
-15	1474	2.00	736	3.64	15.06
-10	1799	2.25	798	3.94	18.46


Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	656	1.24	530	2.85	6.63
-25	851	1.40	608	3.17	8.63
-20	1084	1.57	691	3.50	11.03
-15	1356	1.75	775	3.85	13.86
-10	1671	1.95	858	4.21	17.15

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

## ENVELOPE

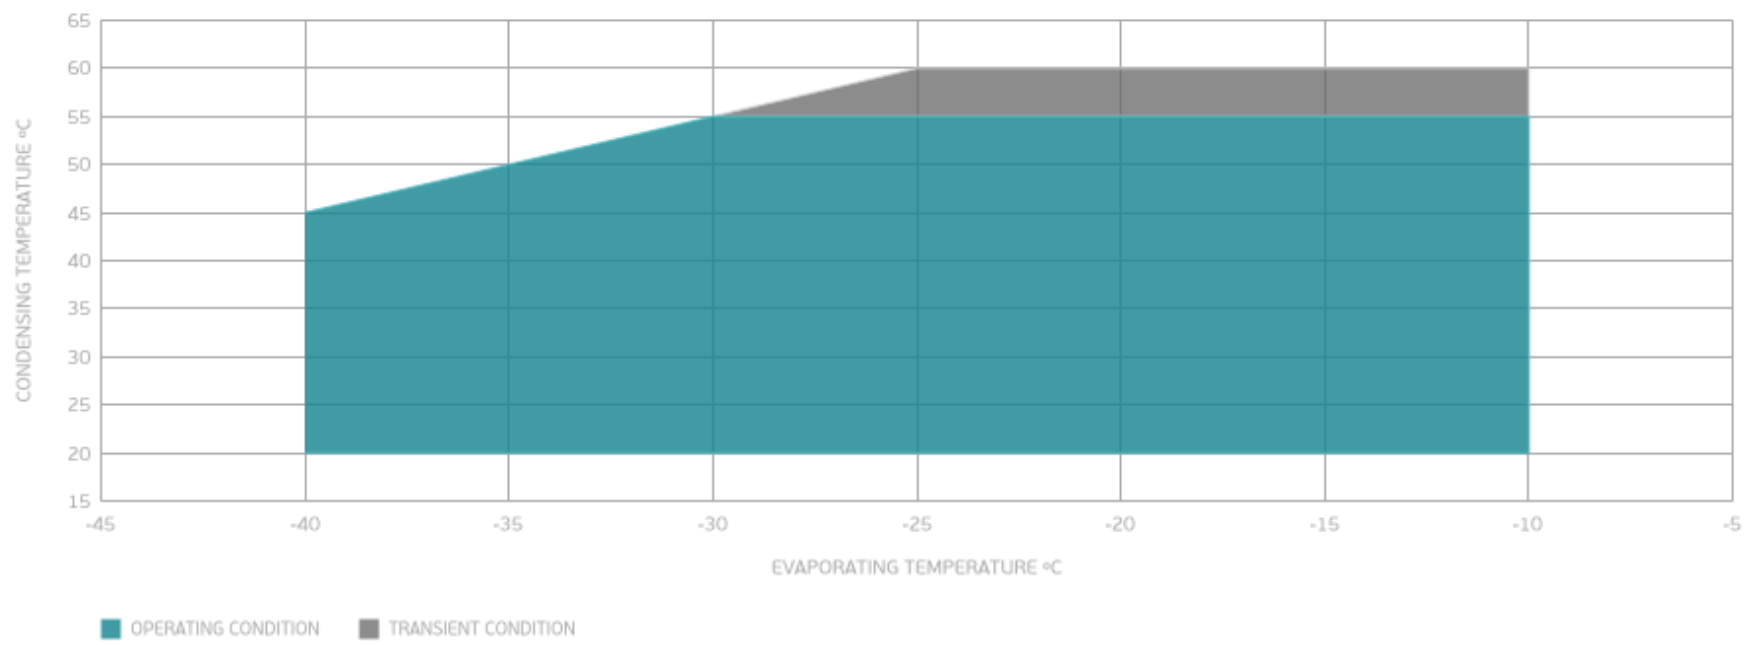

## External

### EXTERNAL CHARACTERISTICS

Base Plate	UNI
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

### EXTERNAL DIMENSIONS

