


NT2192GK



ENGINEERING CODE
923EA04

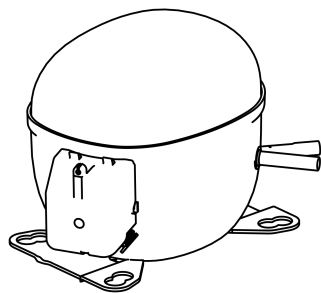

REFRIGERANT
R-404A



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
LBP



MOTOR TYPE
CSCR



STANDARD
ASHRAE



COOLING CAPACITY
1082 W



EFFICIENCY
1.47 W/W



DATA

GENERAL DATA

Model	NT2192GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1 1/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	8.56 Ω at 25°C
Run Winding Resistance	1.82 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	35 A

MECHANICAL DATA

Displacement	22.37 cm ³
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17.5 Kg

ELECTRICAL COMPONENTS

Start Capacitor	130-156 µf/250 V
Run Capacitor	15.0 µf/440 V
CSR CSIR BOX	Yes
Starting Device Description	RVA3N3C-122
Overload Protection	MST26AHK-3261

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	LBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-23.3	1082	1.47	738	3.46	25.02

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE
Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	497	1.18	422	2.21	11.39
-35	671	1.37	491	2.45	15.43
-30	886	1.57	564	2.72	20.44
-25	1143	1.79	638	3.03	26.51
-20	1446	2.04	709	3.38	33.70
-15	1795	2.32	774	3.76	42.09
-10	2193	2.64	830	4.18	51.77

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE
Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	446	1.04	430	2.20	10.22
-35	615	1.21	509	2.50	14.12
-30	823	1.38	595	2.83	18.96
-25	1073	1.57	684	3.18	24.83
-20	1367	1.77	773	3.56	31.80
-15	1707	1.99	859	3.97	39.94
-10	2094	2.23	938	4.40	49.33


Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE
Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	742	1.24	599	2.93	17.05
-25	984	1.40	702	3.32	22.71
-20	1269	1.57	808	3.74	29.44
-15	1598	1.75	914	4.17	37.32
-10	1975	1.94	1016	4.61	46.42

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE

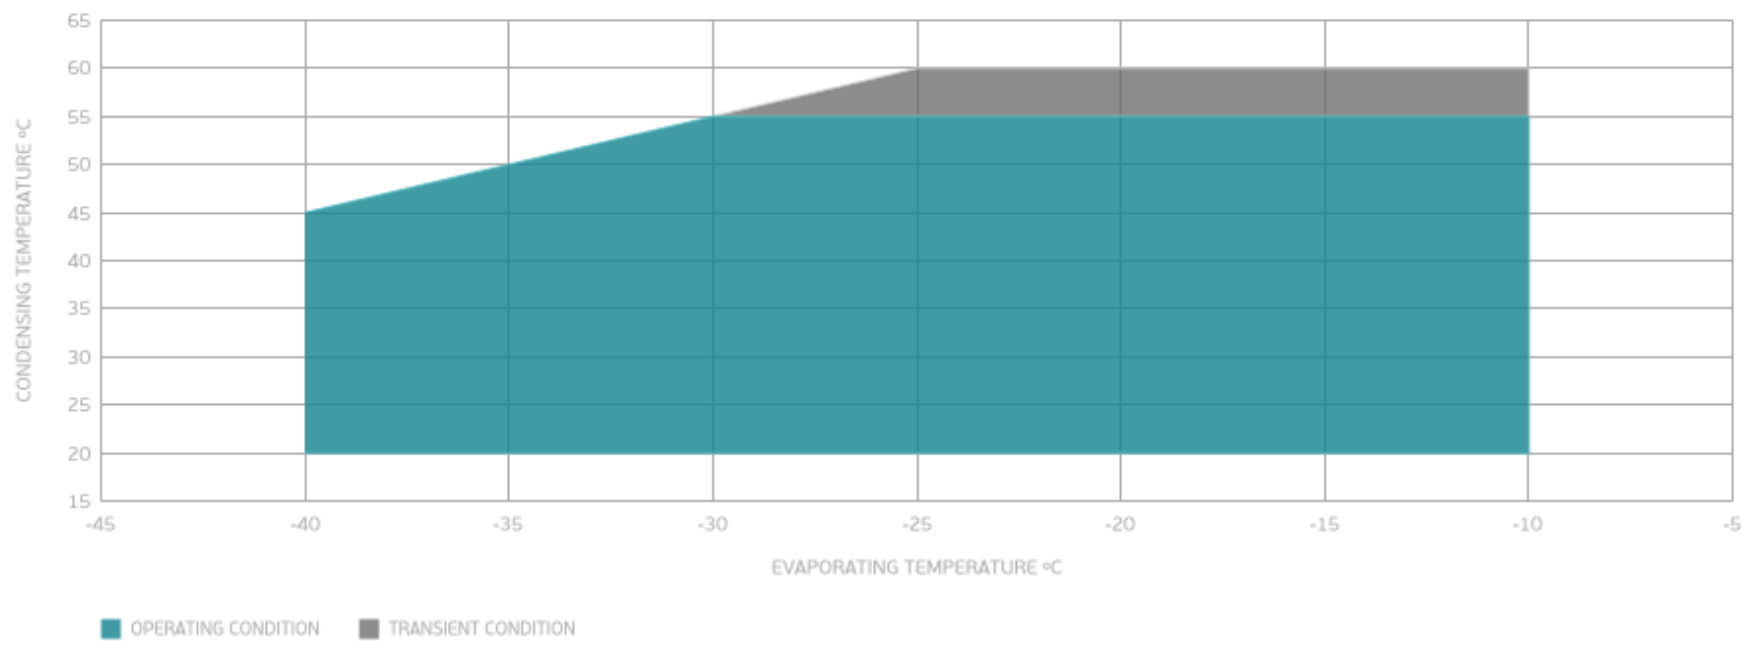

External

EXTERNAL CHARACTERISTICS

Base Plate	UNI
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

EXTERNAL DIMENSIONS

