


NT6217GK

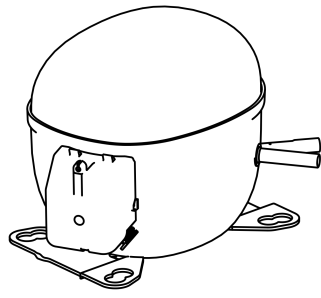

ENGINEERING CODE
922AN04

REFRIGERANT
R-404A

POWER SUPPLY
200-240 V 50
Hz/230 V 60 Hz

APPLICATION
MBP

MOTOR TYPE
CSCR

STANDARD
ASHRAE

COOLING CAPACITY
995 W

EFFICIENCY
1.7 W/W



DATA

GENERAL DATA

Model	NT6217GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/200
HP	3/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	12.7 Ω at 25°C
Run Winding Resistance	2.7 Ω at 25°C

MECHANICAL DATA

Displacement	12.55 cm ³
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17 Kg

ELECTRICAL COMPONENTS

Start Capacitor	72-88 µf/330 V
Run Capacitor	17.5 µf/440 V
CSR CSIR BOX	Yes
Starting Device Description	RVA3N3C-122
Overload Protection	MRA38168-3261

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	200 V
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-6.7	995	1.7	584	-	27.16

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	756	1.82	415	-	16.42
-15	991	2.20	451	-	21.64
-10	1264	2.60	486	-	27.78
-5	1569	3.03	518	-	34.74
0	1899	3.48	546	-	42.43
5	2248	3.95	569	-	50.74
10	2611	4.46	586	-	59.59

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	619	1.43	432	-	14.86
-15	811	1.71	474	-	19.57
-10	1041	2.00	521	-	25.29
-5	1303	2.27	573	-	31.90
0	1590	2.53	628	-	39.33
5	1896	2.77	685	-	47.46
10	2216	2.98	743	-	56.21

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data are an indication of performance based simulation.


PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	845	1.55	546	-	23.11
-5	1058	1.74	609	-	29.19
0	1297	1.90	681	-	36.16
5	1555	2.04	763	-	43.92
10	1826	2.14	853	-	52.38

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data are an indication of performance based simulation.

ENVELOPE

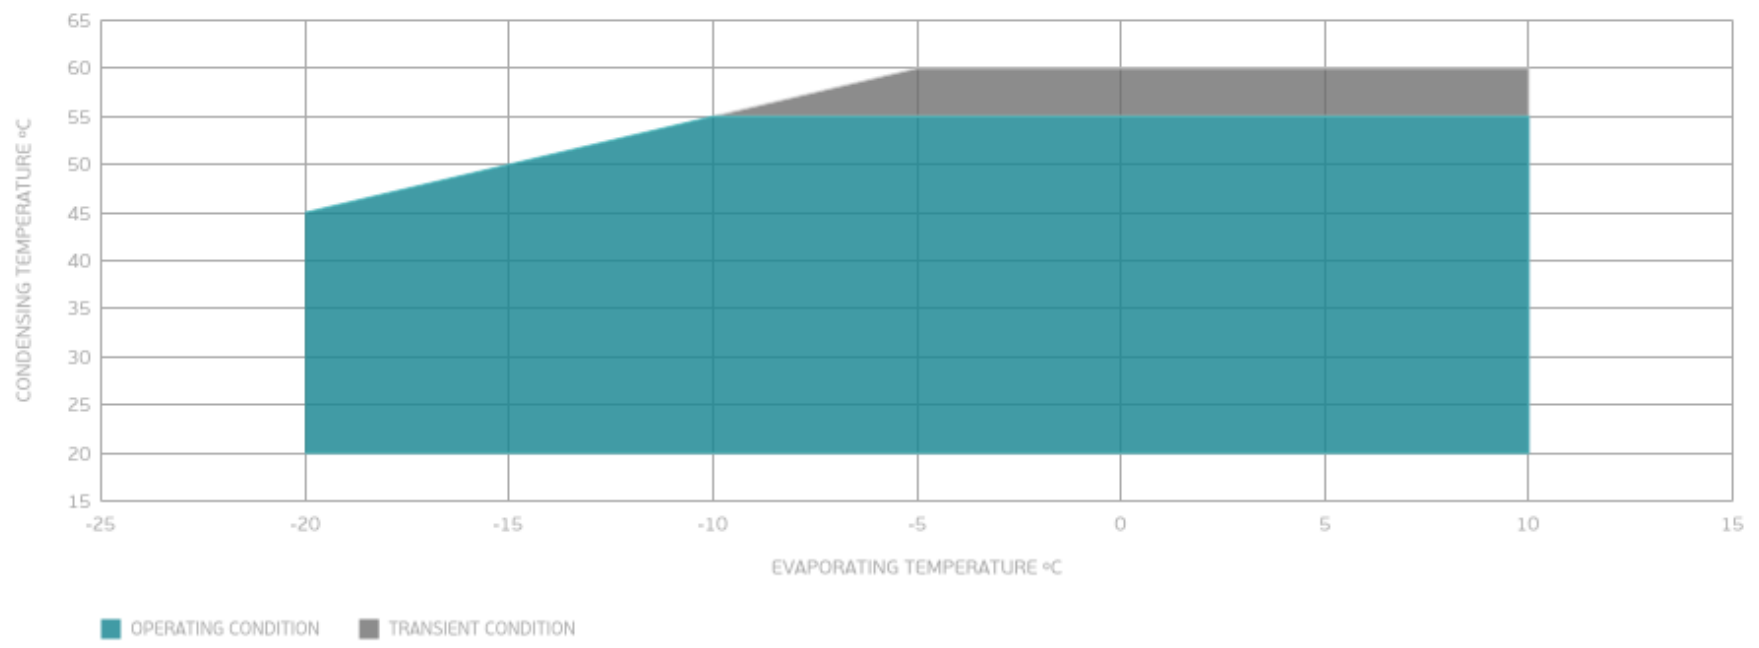

External

EXTERNAL CHARACTERISTICS

Base Plate UNI

Tray Holder NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

EXTERNAL DIMENSIONS

