




NT6222U

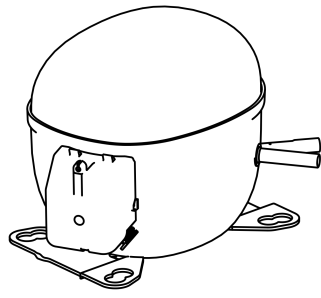

 **ENGINEERING CODE**  
842EA04

 **REFRIGERANT**  
R-290


 **POWER SUPPLY**  
220-240 V 50 Hz

 **APPLICATION**  
MBP

 **MOTOR TYPE**  
CSCR

 **STANDARD**  
ASHRAE

 **COOLING CAPACITY**  
1538 W

 **EFFICIENCY**  
1.91 W/W



DATA

GENERAL DATA

Model	NT6222U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1-
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	9.0 Ω at 25°C
Run Winding Resistance	2.3 Ω at 25°C

## MECHANICAL DATA

Displacement	20.44 cm <sup>3</sup>
Oil Charge	450 ml
Oil Type	AB
Oil Viscosity	ISO32
Weight	17 Kg

## ELECTRICAL COMPONENTS

Start Capacitor	43-53 µf/330 V
Run Capacitor	15.0 µf/440 V
CSR CSIR BOX	Yes
Starting Device Description	RVA4AL3C-560
Overload Protection	T0485/G9

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	MBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Max Refrigerant Charge	400 g
Refrigerant Temperature	Dew

### RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-6.7	1538	1.91	807	4.33	17.59

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1156	2.00	579	3.38	11.13
-15	1446	2.29	632	3.59	13.98
-10	1780	2.61	682	3.77	17.28
-5	2165	3.00	722	3.90	21.10
0	2605	3.49	746	4.00	25.54
5	3106	4.15	747	4.05	30.65
10	3672	5.09	721	4.07	36.53

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	978	1.61	609	3.48	10.17
-15	1246	1.86	672	3.74	13.02
-10	1554	2.11	736	3.97	16.31
-5	1907	2.39	797	4.16	20.11
0	2309	2.72	848	4.32	24.50
5	2767	3.13	883	4.44	29.57
10	3285	3.67	896	4.53	35.38


Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1315	1.74	757	4.16	15.07
-5	1636	1.96	834	4.43	18.86
0	2001	2.21	906	4.67	23.22
5	2415	2.50	967	4.88	28.24
10	2884	2.85	1012	5.06	34.00

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

## ENVELOPE

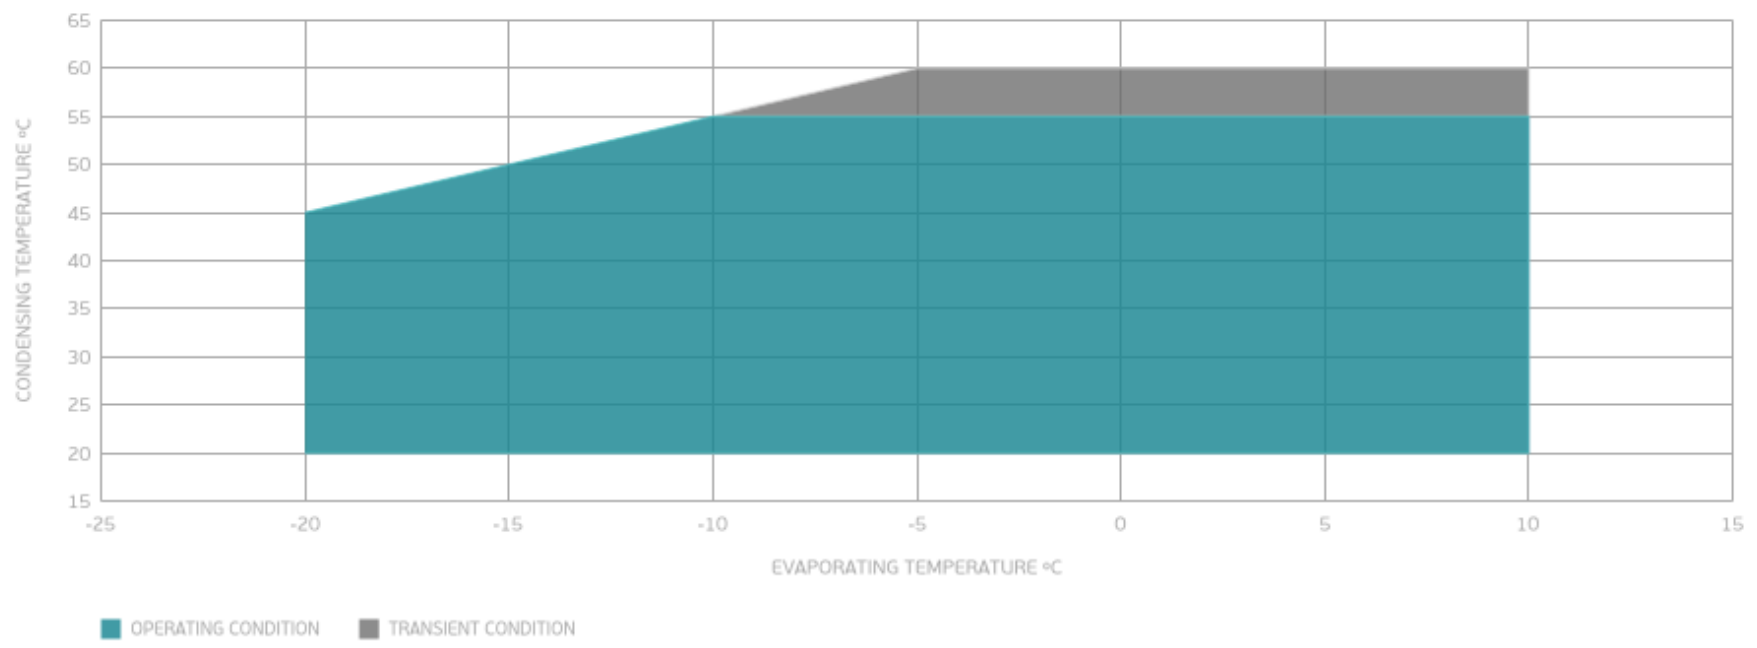

## External

### EXTERNAL CHARACTERISTICS

Base Plate UNI

Tray Holder NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

### EXTERNAL DIMENSIONS

