


NT6230U



**ENGINEERING CODE**  
843EA02

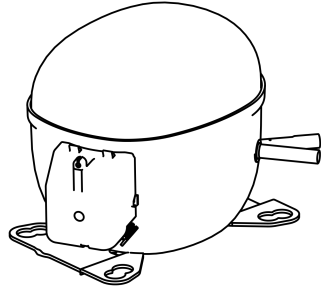

**REFRIGERANT**  
R-290



**POWER SUPPLY**  
220-240 V 50 Hz



**APPLICATION**  
MBP



**MOTOR TYPE**  
CSCR



**STANDARD**  
ASHRAE



**COOLING CAPACITY**  
2144 W



**EFFICIENCY**  
1.95 W/W



DATA

GENERAL DATA

Model	NT6230U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1 1/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	7.56 Ω at 25°C
Run Winding Resistance	2.22 Ω at 25°C

## MECHANICAL DATA

Displacement	27.8 cm <sup>3</sup>
Oil Charge	450 ml
Oil Type	AB
Oil Viscosity	ISO32
Weight	16.6 Kg

## ELECTRICAL COMPONENTS

Start Capacitor	130-156 µf/330 V
Run Capacitor	20.0 µf/400 V
CSR CSIR BOX	Yes
Starting Device Description	RVA403C-123
Overload Protection	USP-553-84 (internal)

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	MBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Max Refrigerant Charge	400 g
Refrigerant Temperature	Dew

### RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-6.7	2144	1.95	1098	5.52	24.52

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1611	2.09	773	4.01	15.52
-15	2017	2.41	836	4.22	19.50
-10	2511	2.76	911	4.48	24.37
-5	3090	3.14	985	4.78	30.14
0	3755	3.58	1048	5.12	36.83
5	4504	4.13	1090	5.52	44.46
10	5336	4.86	1098	5.96	53.06

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1417	1.66	854	4.23	14.74
-15	1759	1.93	913	4.52	18.38
-10	2182	2.19	996	4.82	22.90
-5	2684	2.46	1090	5.16	28.31
0	3264	2.75	1186	5.51	34.64
5	3921	3.08	1273	5.90	41.90
10	4653	3.48	1339	6.31	50.12


Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1850	1.79	1035	5.27	21.20
-5	2272	2.00	1135	5.69	26.19
0	2765	2.21	1249	6.11	32.09
5	3328	2.44	1366	6.54	38.91
10	3959	2.68	1475	6.97	46.69

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

## ENVELOPE

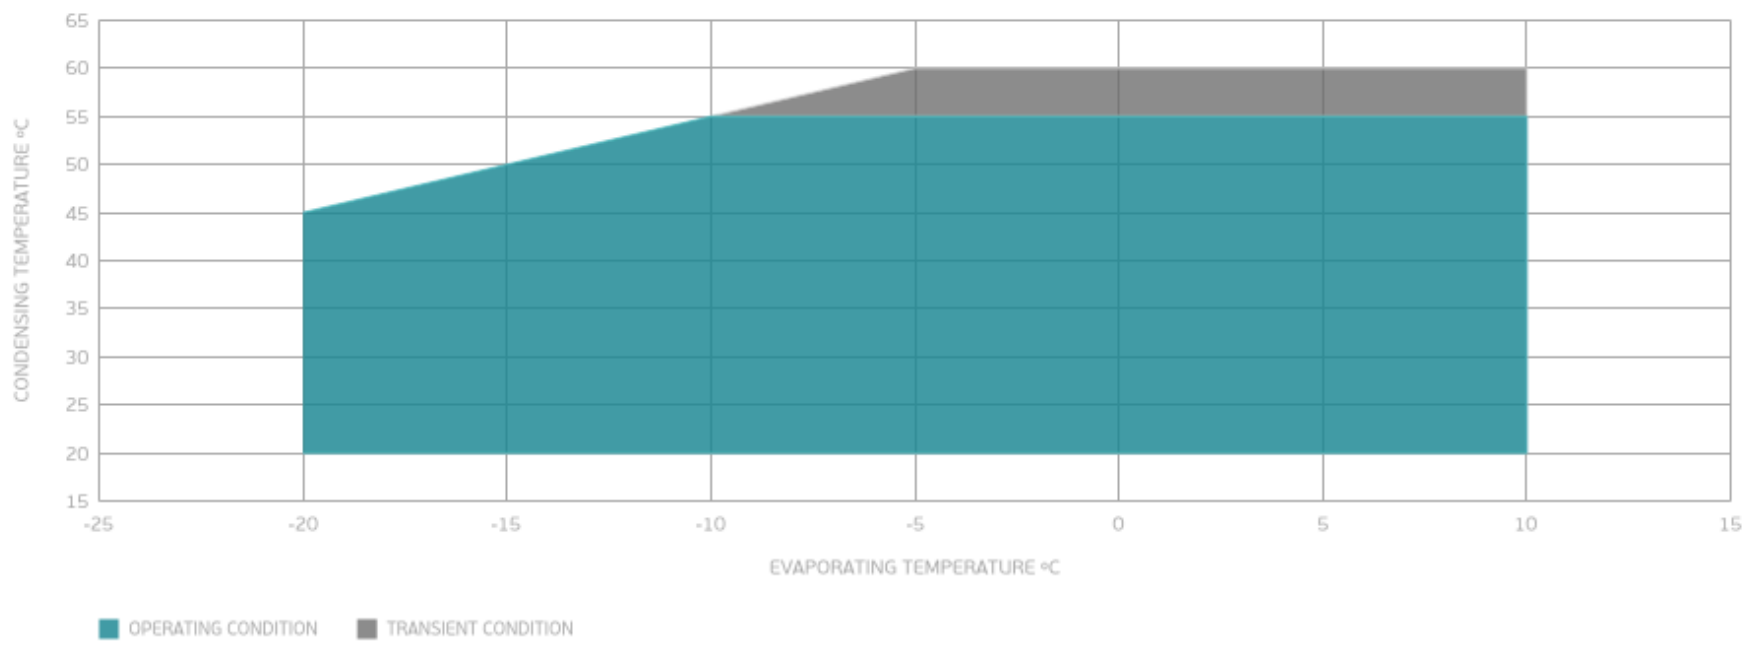

## External

### EXTERNAL CHARACTERISTICS

Base Plate UNI

Tray Holder NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

### EXTERNAL DIMENSIONS

